



Resistance Sensors (Dual Probe)

Models NS129, NS132 and NS139

FEATURES

- 100% functionally tested
- Solid state sensing circuitry
- Isolated UL Class II sensing voltage
- Adjustable sensitivity by Trimpot
- #6 screw terminal connections
- Conformal coating to protect circuit from harsh environments
-   File #E61377

Operating Logic: In Models NS129 and NS139 (Pump Down) the output relay is de-energized until the liquid reaches the high probe. When liquid touches the high probe, the output relay is activated until the level drops below the low probe.

In Models NS132 (Pump Up) the output relay is energized until the liquid reaches the high probe. When the liquid touches the high probe, the output relay is deactivated until the level drops below the low probe.

If the tank is non-conductive, a third (common) probe must be installed at a level where it will always be submerged.

SPECIFICATIONS

CONTROL TYPE

On/Off Resistance Sensing:

NS129 and NS139: Probe resistance below set point activates relay

NS132: Probe resistance above set point activates relay

Sensing Voltage: 15 VAC, max. RMS

Sensing Current: 2.0 mA, max. RMS

Sensitivity Adjustment: Adjustable by a Trimpot from .1-100 K ohms +10%, -0%

INPUT

Operating Voltage: 120, 240 VAC, ±10%

Power Consumption: 11 VA max. for 120 VAC units

Frequency: 50/60 Hz

OUTPUT

Type:

NS129 and NS132: Relay contacts SPDT (1 Form C)

NS139: Relay contacts DPDT (2 Form C)

Rating: 10 A resistive at 120 VAC; 5 A resistive at 240 VAC; 100 mA at 5 VDC min. load current

Life:

Mechanical: 10,000,000 cycles

Electrical: 100,000 min. at full load

PROTECTION

Isolation: 1500 VAC between probe and other terminals






MECHANICAL

Terminations: Terminal blocks with #6 screw connections

Mounting: 4-.141" dia. mounting holes

ENVIRONMENTAL

Operating Temperature: -20°C to 55°C

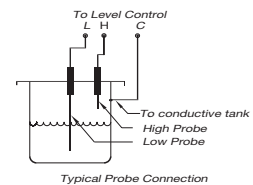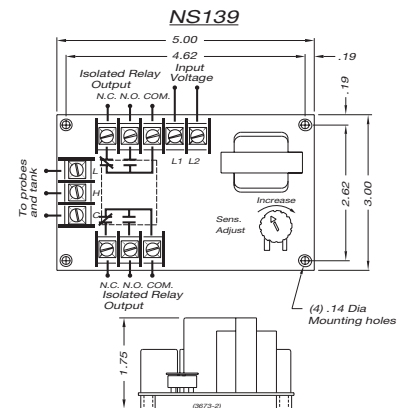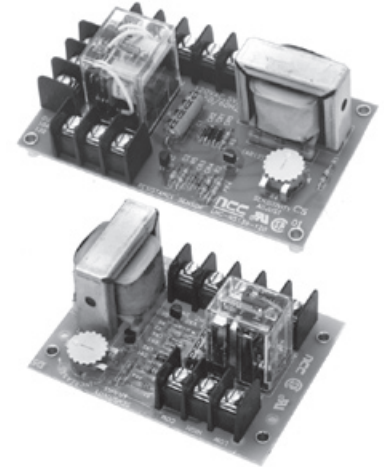

ORDERING INFORMATION

LOGIC TYPE	INPUT VOLTAGE	PART NUMBER
Pump Down	120 VAC	LNC-NS129-120
Pump Down	240 VAC	LNC-NS129-240
Pump Down	120 VAC	LNC-NS139-120
Pump Up	120 VAC	LNC-NS132-120
Pump Up	240 VAC	LNC-NS132-240

ACCESSORY	PART NUMBER
Probe Holder with Ground	LLH-11383-010
Probe, 6" Long, 1/4" Dia., S.S.	LLP-06.00-OSS
Probe, 12" Long, 1/4" Dia., S.S.	LLP-12.00-OSS
Probe, 24" Long, 1/4" Dia., S.S.	LLP-24.00-OSS
Probe Assembly, Plastic Body	LLP-001/2-011